



decu[®]light

width 80/90 cm

load capacity 150 kg

height 10 cm




II. deg. pressure ulcers

air

Dynamic anti-decubitus air mattress



The traditional air mattress conception is widely used all over the world in home, social and hospital care. Overlay mattress with height 10 cm for decubitus stage I. to II./ low to medium with load capacity 150 kg. The mattress is composed of 18 cells, 4 cells under the head have a pillow function. Available in two widths 80 or 90 cm. Manual compressor to adjust pressure in the mattress using rotary control in 3 levels.

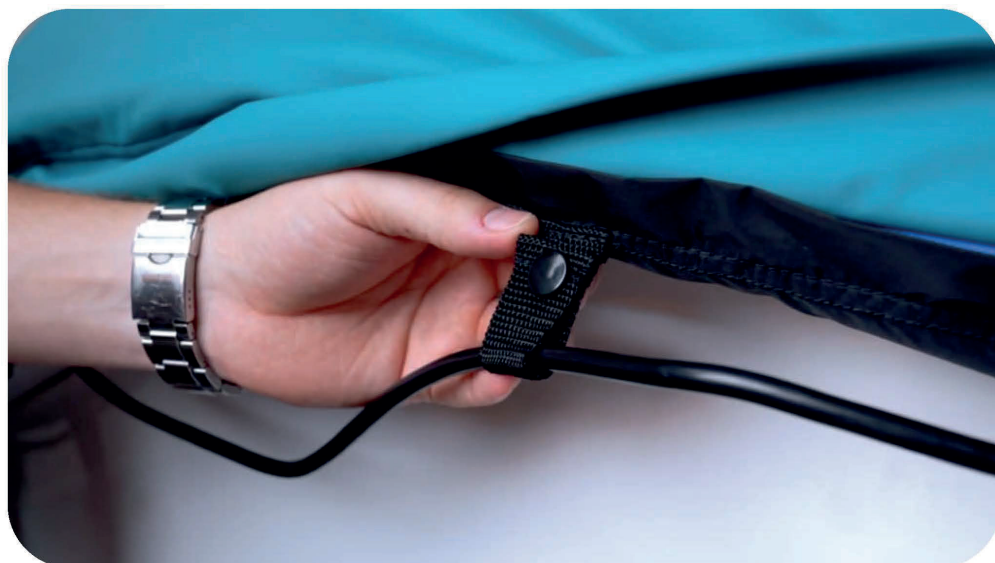

MATTRESS

- 2-way stretch, waterproof, breathable, fire-retardant cover
- Easy maintenance - washable up to 95°C
- Zipper 360° with perimeter protect flap which reduces the risk of contamination
- Integrated power cable fixation system
- 4 straps for easy fixation of the mattress to the bed
- Quick release CPR valve for acute resuscitation

TECHNICAL PARAMETERS

name	decu light
type	air mattress
stage of decubitus	I. - II. (low to medium)
generic group	dynamic anti-decubitus air mattress
Basis UDI-DI	859421899IDAAME3
REF / GTIN (90 cm)	1-219-01 / 08594218992193
REF / GTIN (80 cm)	1-218-01 / 08594218992186
package size	48 x 38 x 26 cm
package weight	9 kg
package includes	mattress with cover, compressor, user manual, transport bag
warranty	2 years

COMPRESSOR

- Manual compressor to adjust pressure in the mattress using rotary control in 3 levels.
- Alternate mode: APT - Alternate Pressure Therapy mode A-B-C (12 min)
- Auto-firm mode: LMP - time-Limited Maximum Pressure mode
- Visual alarm - low pressure
- AVS - Anti Vibration System for vibration reduction and quiet operation
- START/STOP system for energy reduction
- Integrated compressor holder

MATTRESS

type	overlay mattress
load capacity	150 kg
height	10 cm
dimension	80/90 x 200 cm
number of cells	18 pes - width 11 cm
pillow function	4 head cell without alternation
CPR valve	quick release - manual
next functions	integrated power cable fixation system 4 straps for easy fixation to the bed
material	polyurethane
cleaning	thermal disinfection
weight	5,9 kg
cover	PU, 2-way stretch, waterproof, breathable, fireretardant, 95°C washable, zipper 360°with flap

COMPRESSOR

type	manual
modes	2 - alternate/auto-firm
alternate mode	3-chamber air exchange system A-B-C
time interval	12 minutes
alarm	visual
alarm type	low pressure
next functions	Start/Stop, AVS
noise	<25 dB
holder	integrated
flow rate	4,5 LPM
oper. pressure	35-70 mmHg
material	ABS housing
IP	42
size	7,6x14x26 cm
weight	2,4 kg

